



For detailed information on setting up and using your H-mini, visit <https://www.harvst.co.uk/support>

Core H-mini kit

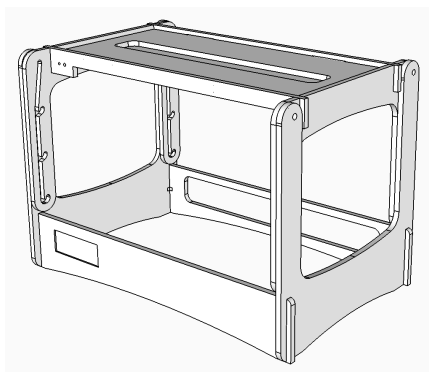

H-mini frame with LED grow light
Supplied as separate parts




24-cell propagator




12V power supply

Once you've assembled and plugged in your H-mini, you will need to set the time, so that the lights come on and off at the right time of day. Connect to the H-mini wifi network on your phone, then go to <http://192.168.4.1> in an internet browser. This will take you to the **Device Control Panel**. For more detailed information, see our online support pages and videos. *If you connect your H-mini to the internet (via Wifi settings on the Device Control Panel), it will automatically correct the time following a power cut.*

Optional hydroponics kit

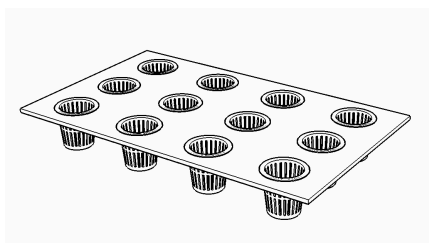

12x net cups, with 1x cup tray

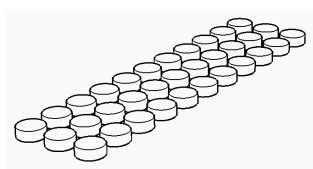


24x jiffy pellet




1x nutrient 300ml

Optional extra level

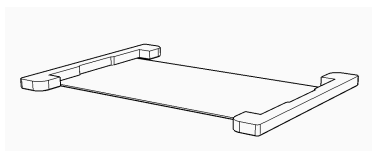

Led grow light with supports



Propagator




Light cable

Fixings:
4x 16mm bolt
4x M5 nut
4x 25mm bolt

To fit the extra level:

1. Fit the light to the underside of the bamboo support bars (see image above).
2. Replace the 12mm bolts which you will have already fitted to the single-level H-mini with the 25mm bolts, and rest the extra level on the bolts.


Assembly instructions

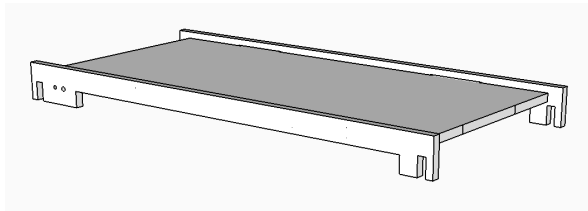

Step 1

Push the lid front and rear onto the lid, with the button poking through the hole in the front.


The button is used to manually dim the light.

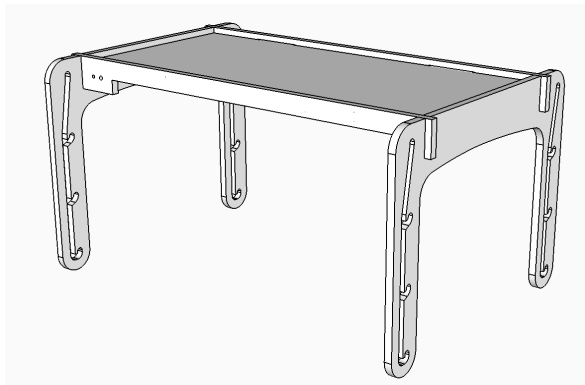

Step 2


Slot the lid onto the upper legs.

Note the orientation of the upper legs.

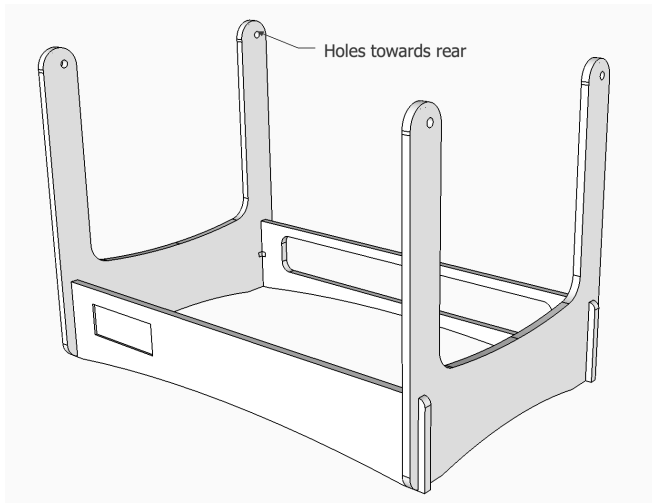

Step 3

Slot the lower frame together as per the image.

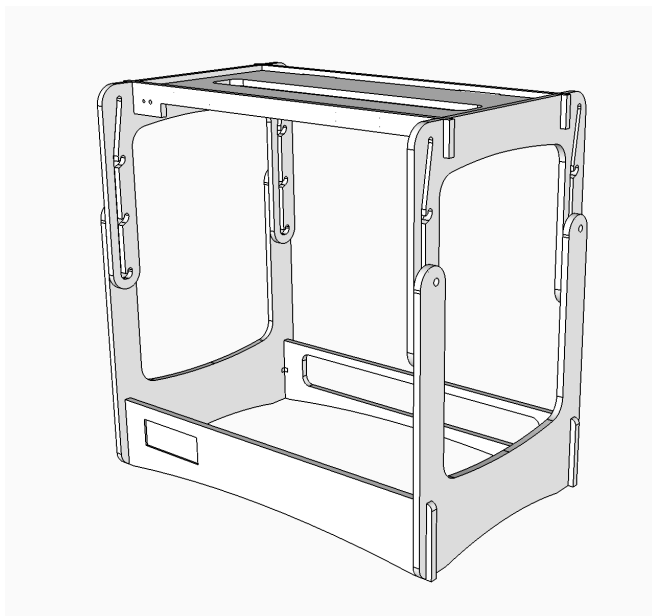

Step 4

Using the supplied 12mm bolts, loosely bolt the top part of the frame to the lower part. Keep the bolts loose so that you can adjust the height of the light as your plants grow.

Finally, plug the power supply into the **right hand** socket at the rear:

